


APPENDIX A
CONSTRUCTION PROGRAMME AND
PROACTIVE ENVIRONMENTAL
PROTECTION PROFORMA

Construction Programme (Feb – Apr 2026)


Design & Construction of Kong Nga Po Police Training Facilities Programme

Revision : Revision 16 (August 2025)

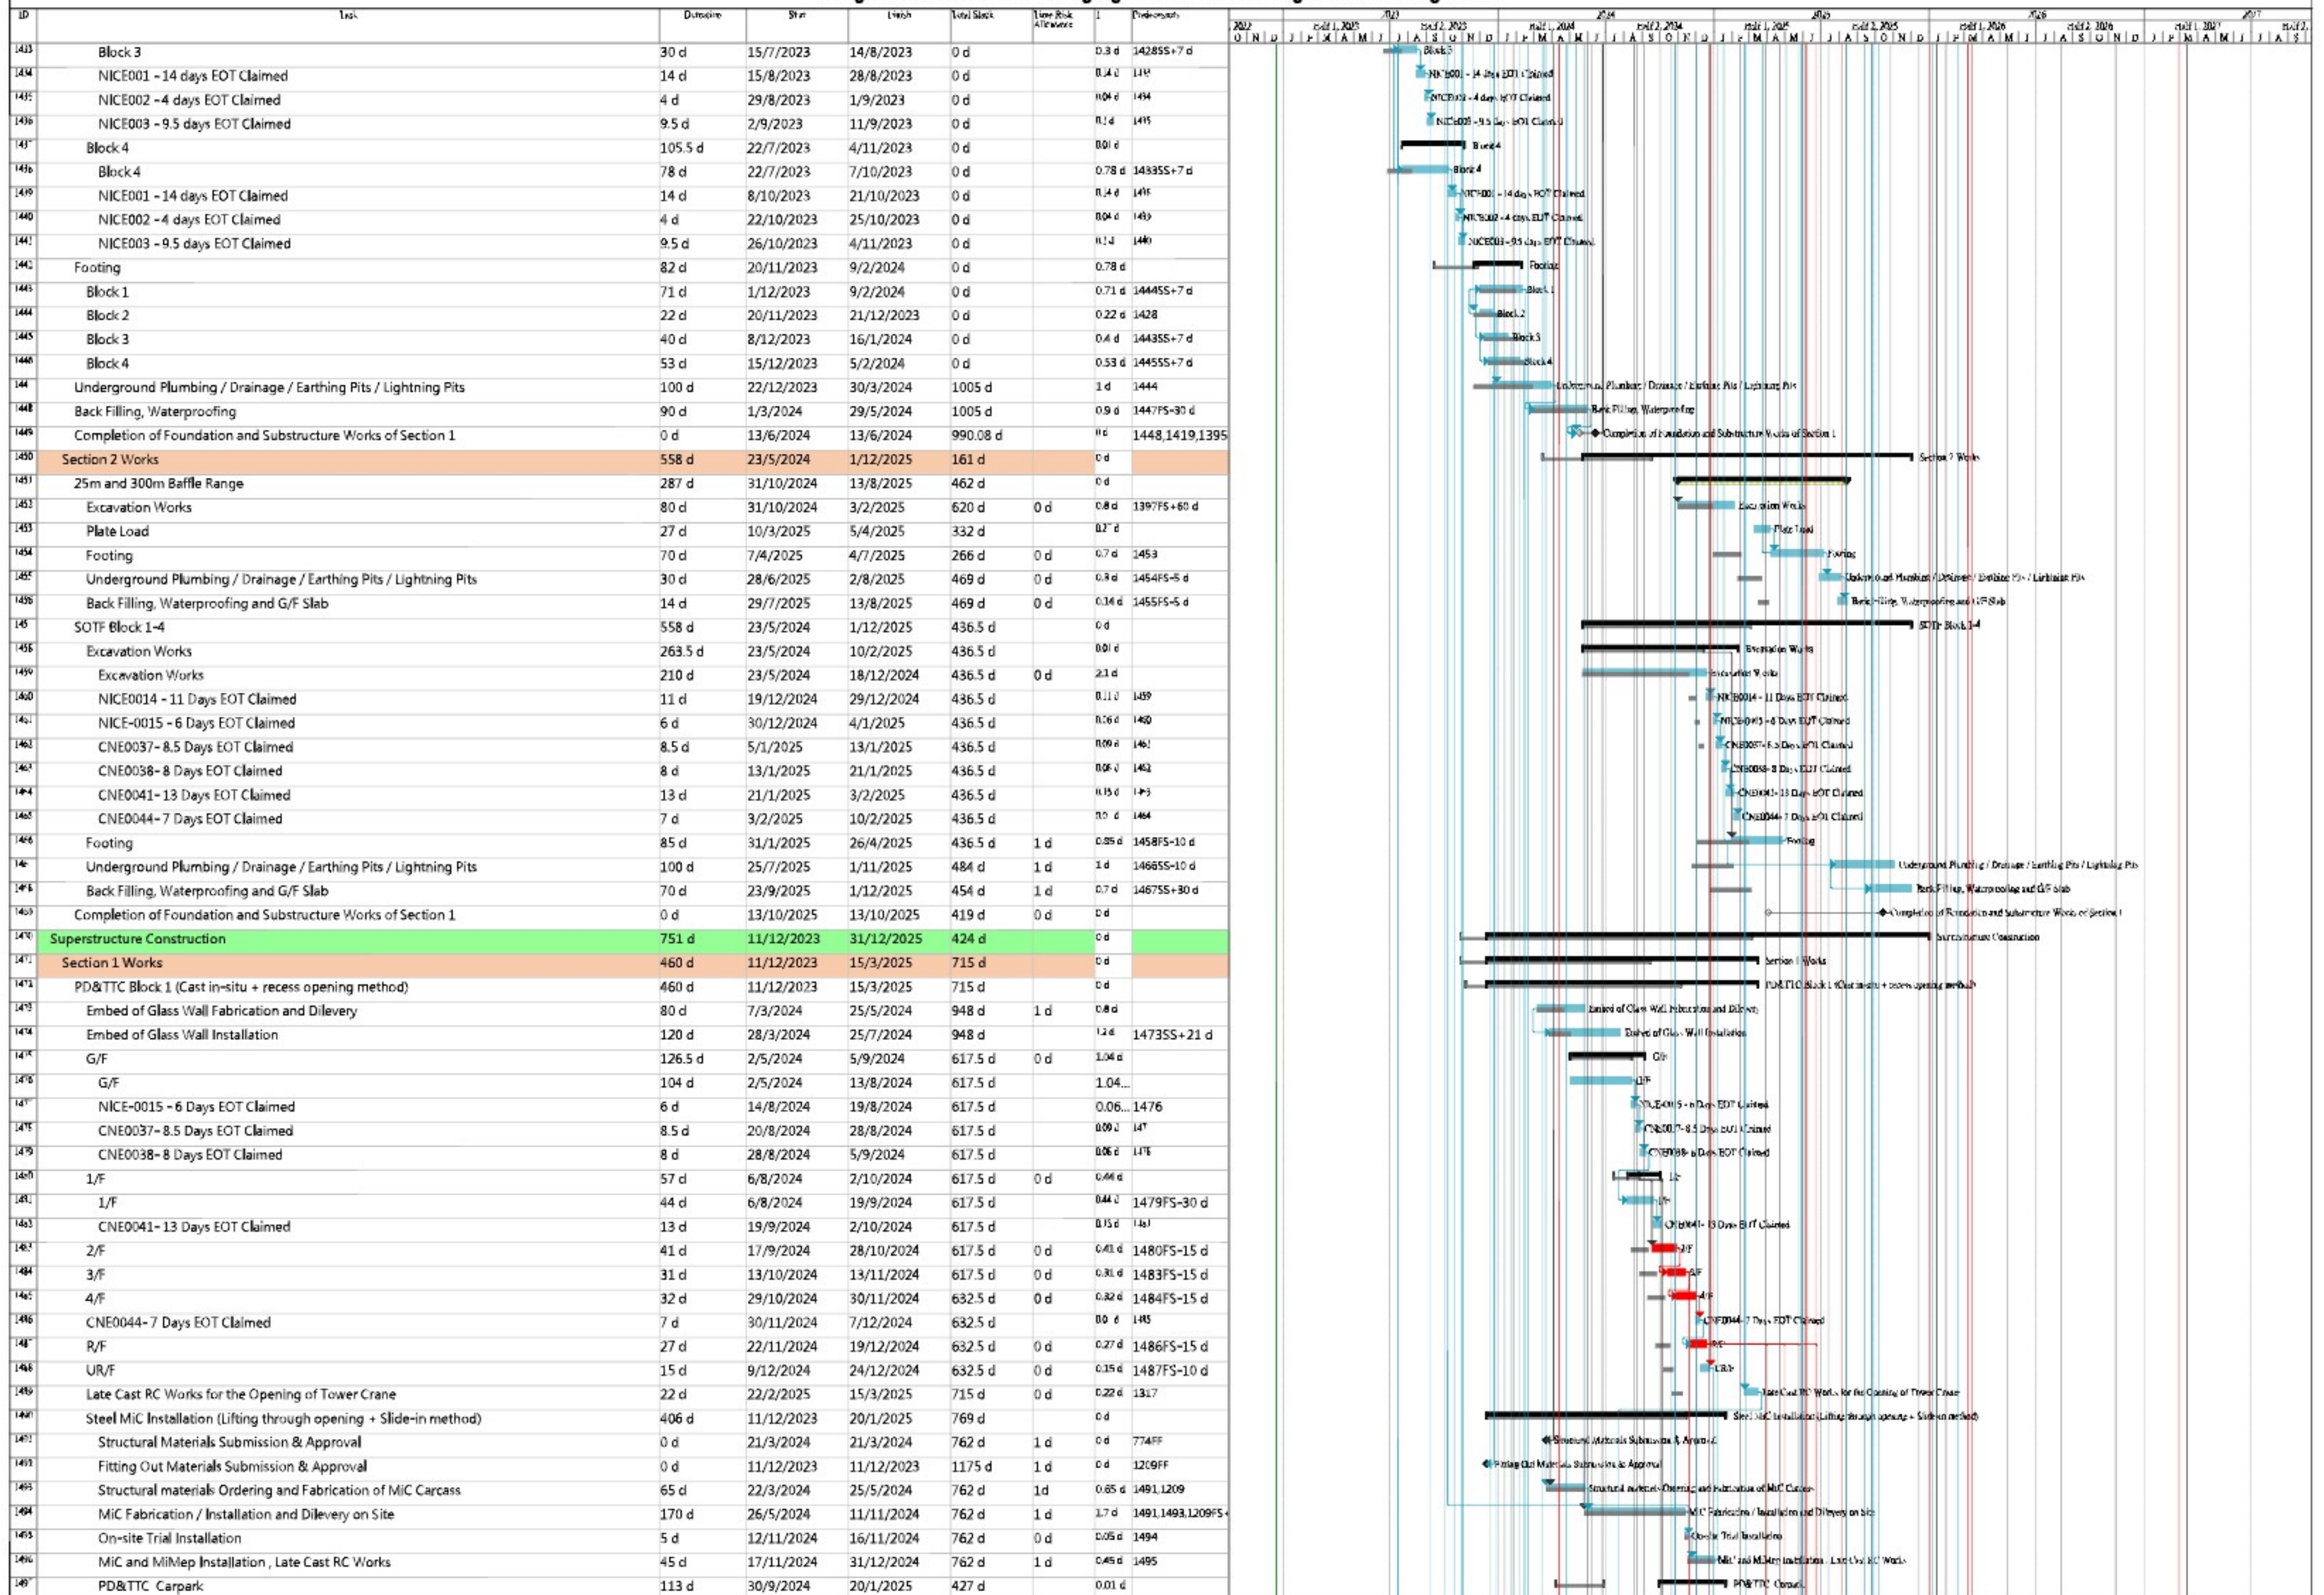



Design & Construction of Kong Nga Po Police Training Facilities Programme

Revision : Revision 16 (August 2025)

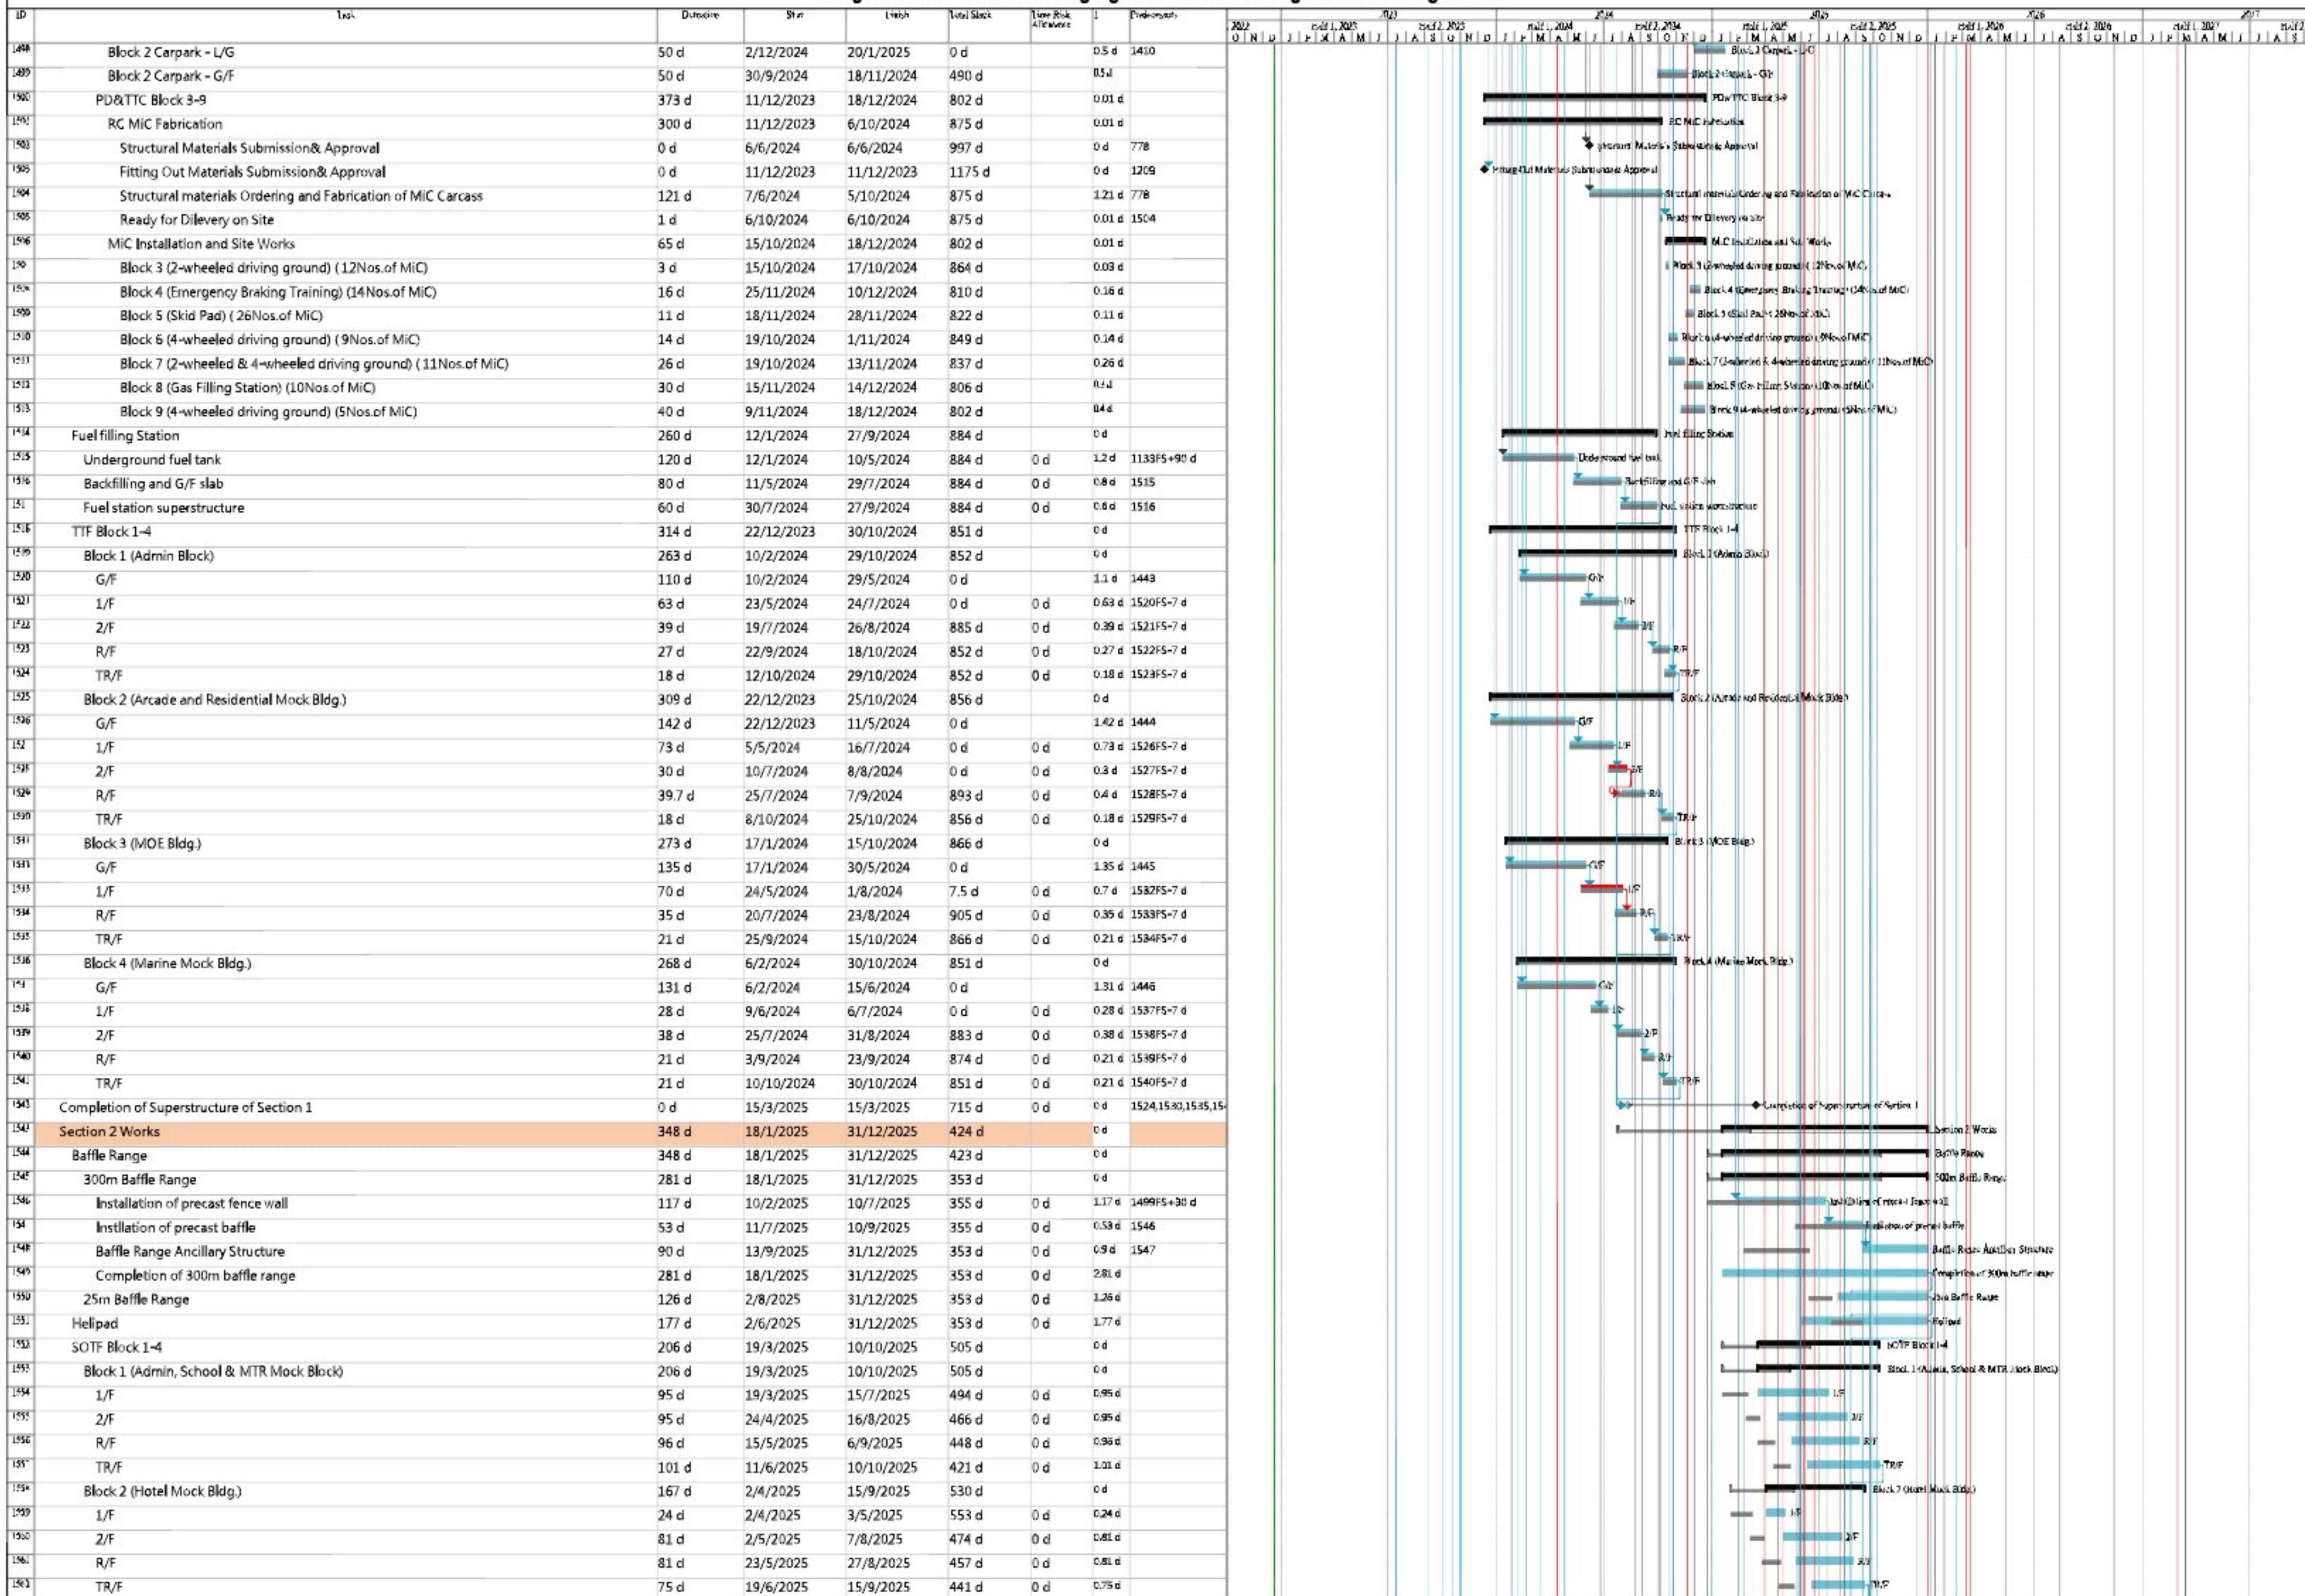

Design & Construction of Kong Nga Po Police Training Facilities Programme

Revision : Revision 16 (August 2025)

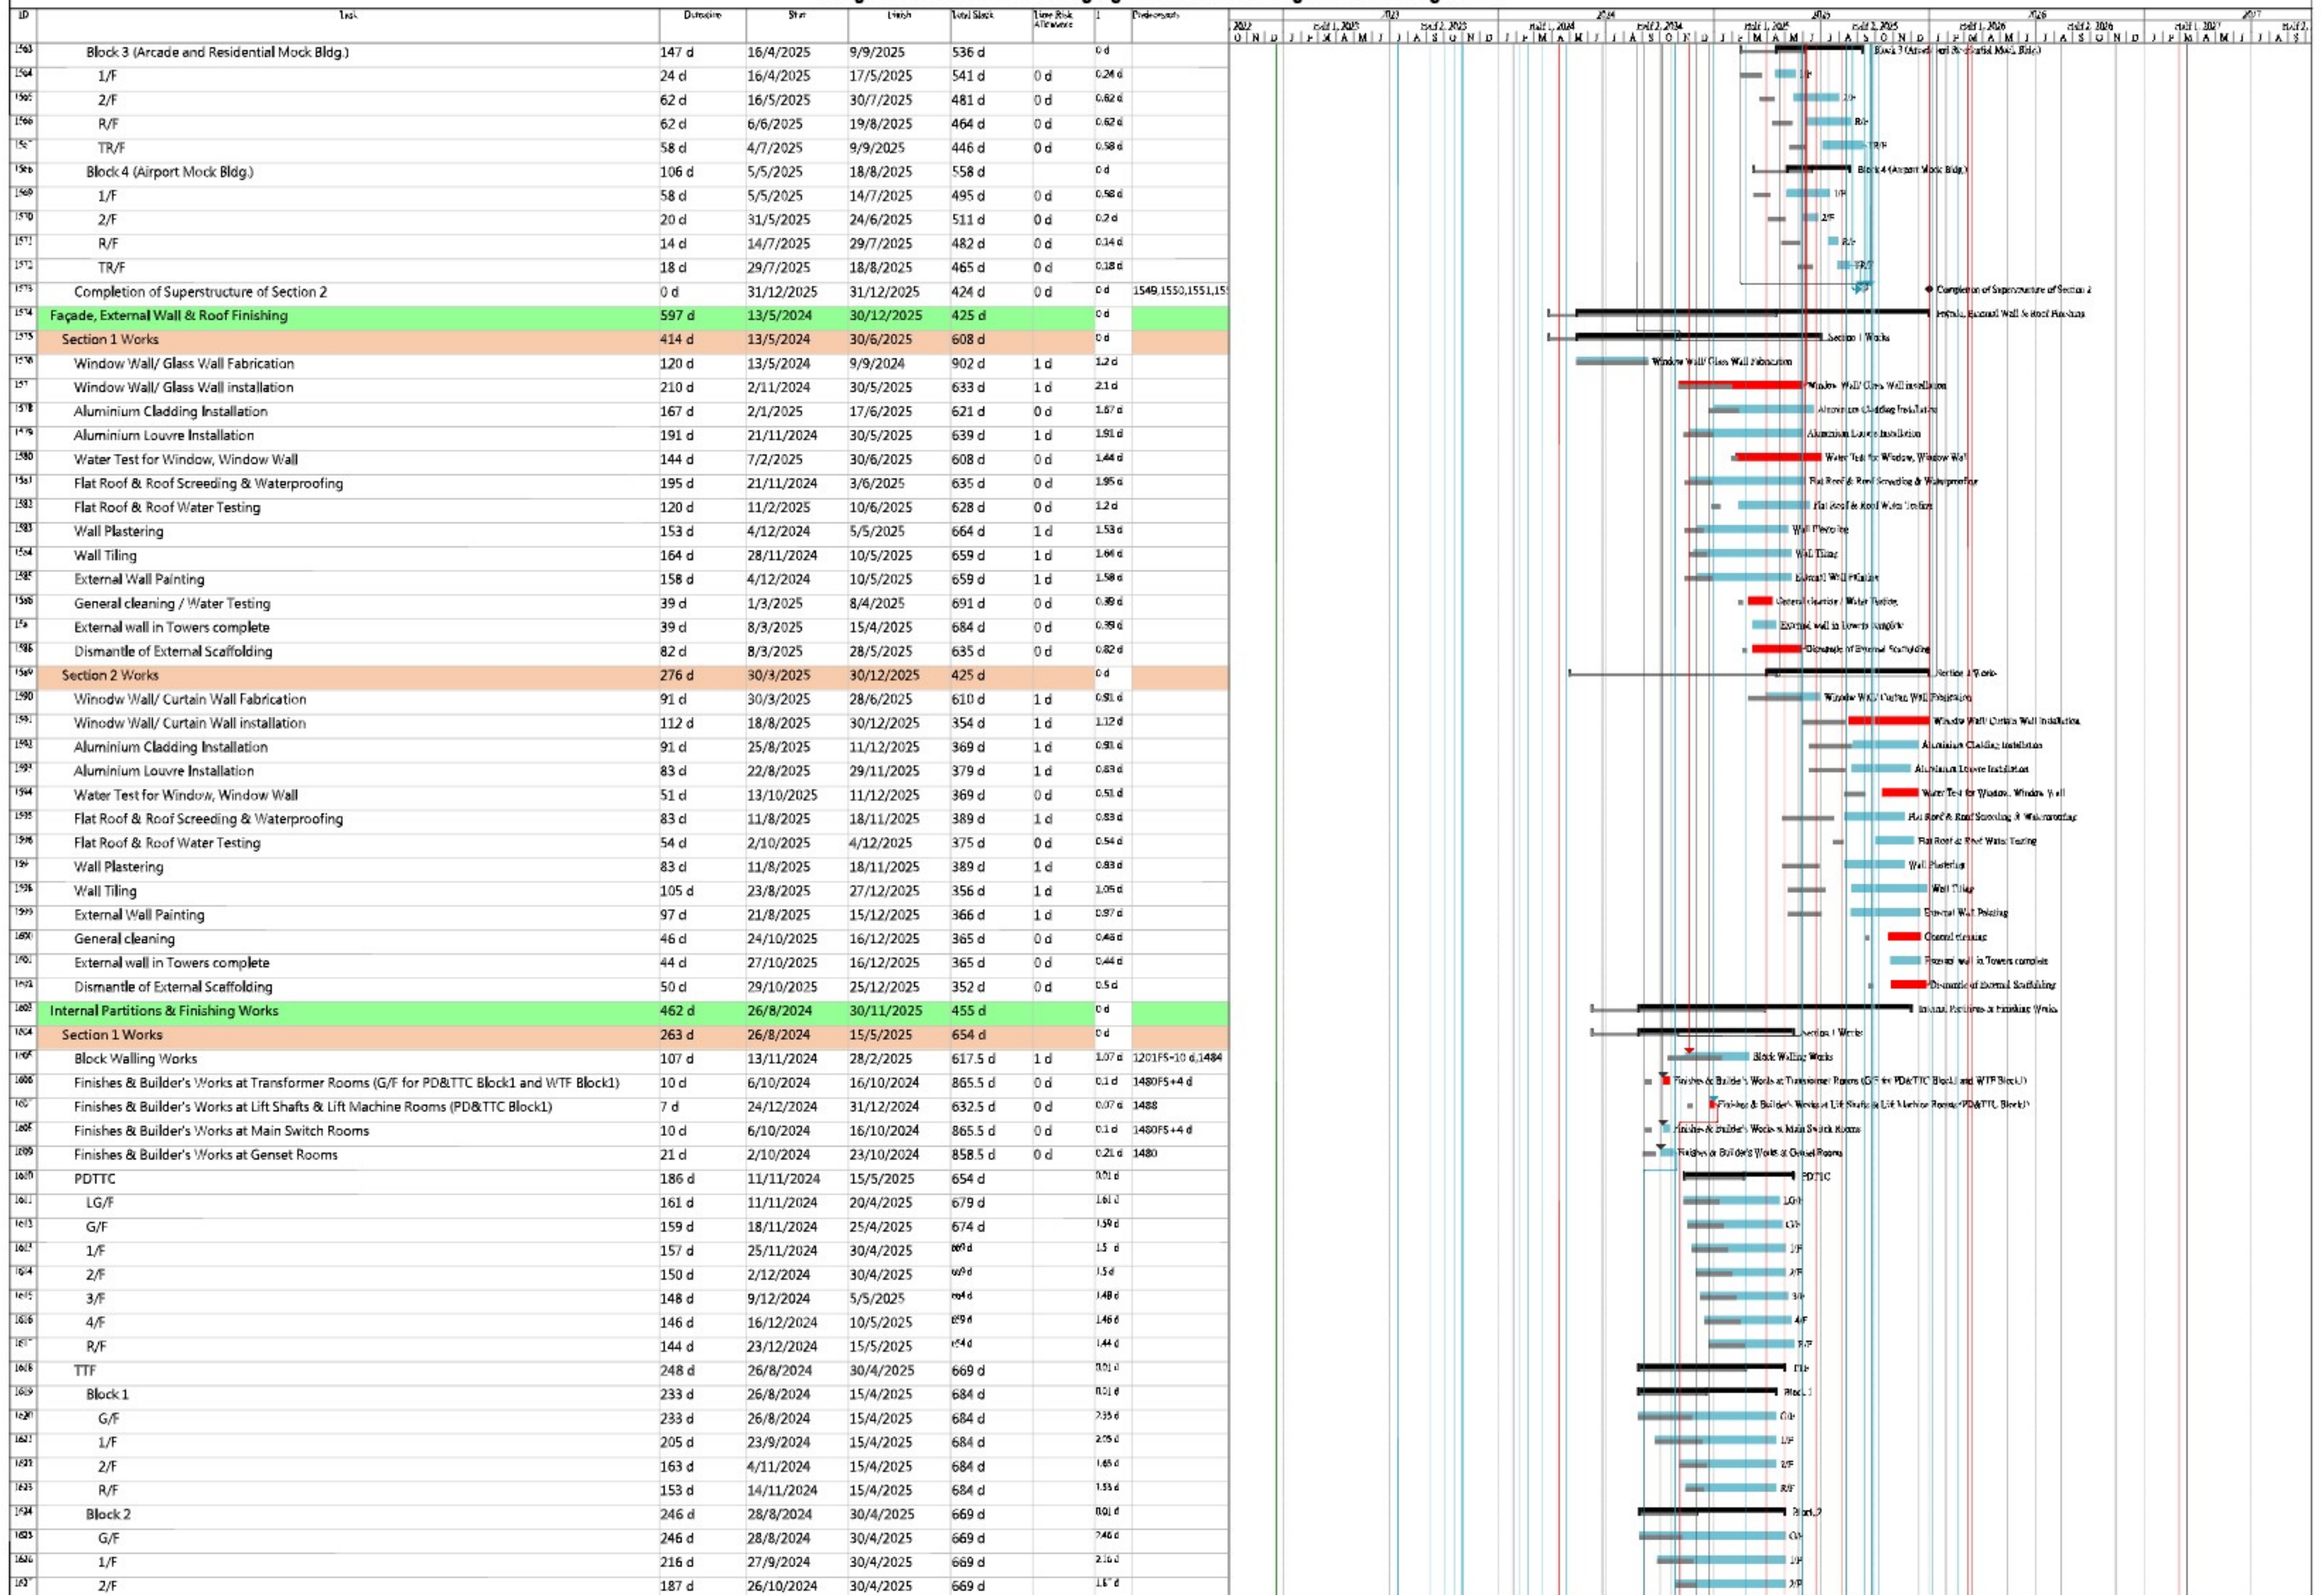

Design & Construction of Kong Nga Po Police Training Facilities Programme

Design & Construction of Kong Nga Po Police Training Facilities Programme

Design & Construction of Kong Nga Po Police Training Facilities Programme

Design & Construction of Kong Nga Po Police Training Facilities Programme

Design & Construction of Kong Nga Po Police Training Facilities Programme

Design & Construction of Kong Nga Po Police Training Facilities Programme


Design & Construction of Kong Nga Po Police Training Facilities Programme

Design & Construction of Kong Nga Po Police Training Facilities Programme

Design & Construction of Kong Nga Po Police Training Facilities Programme

Design & Construction of Kong Nga Po Police Training Facilities Programme

Revision : Revision 16 (August 2025)

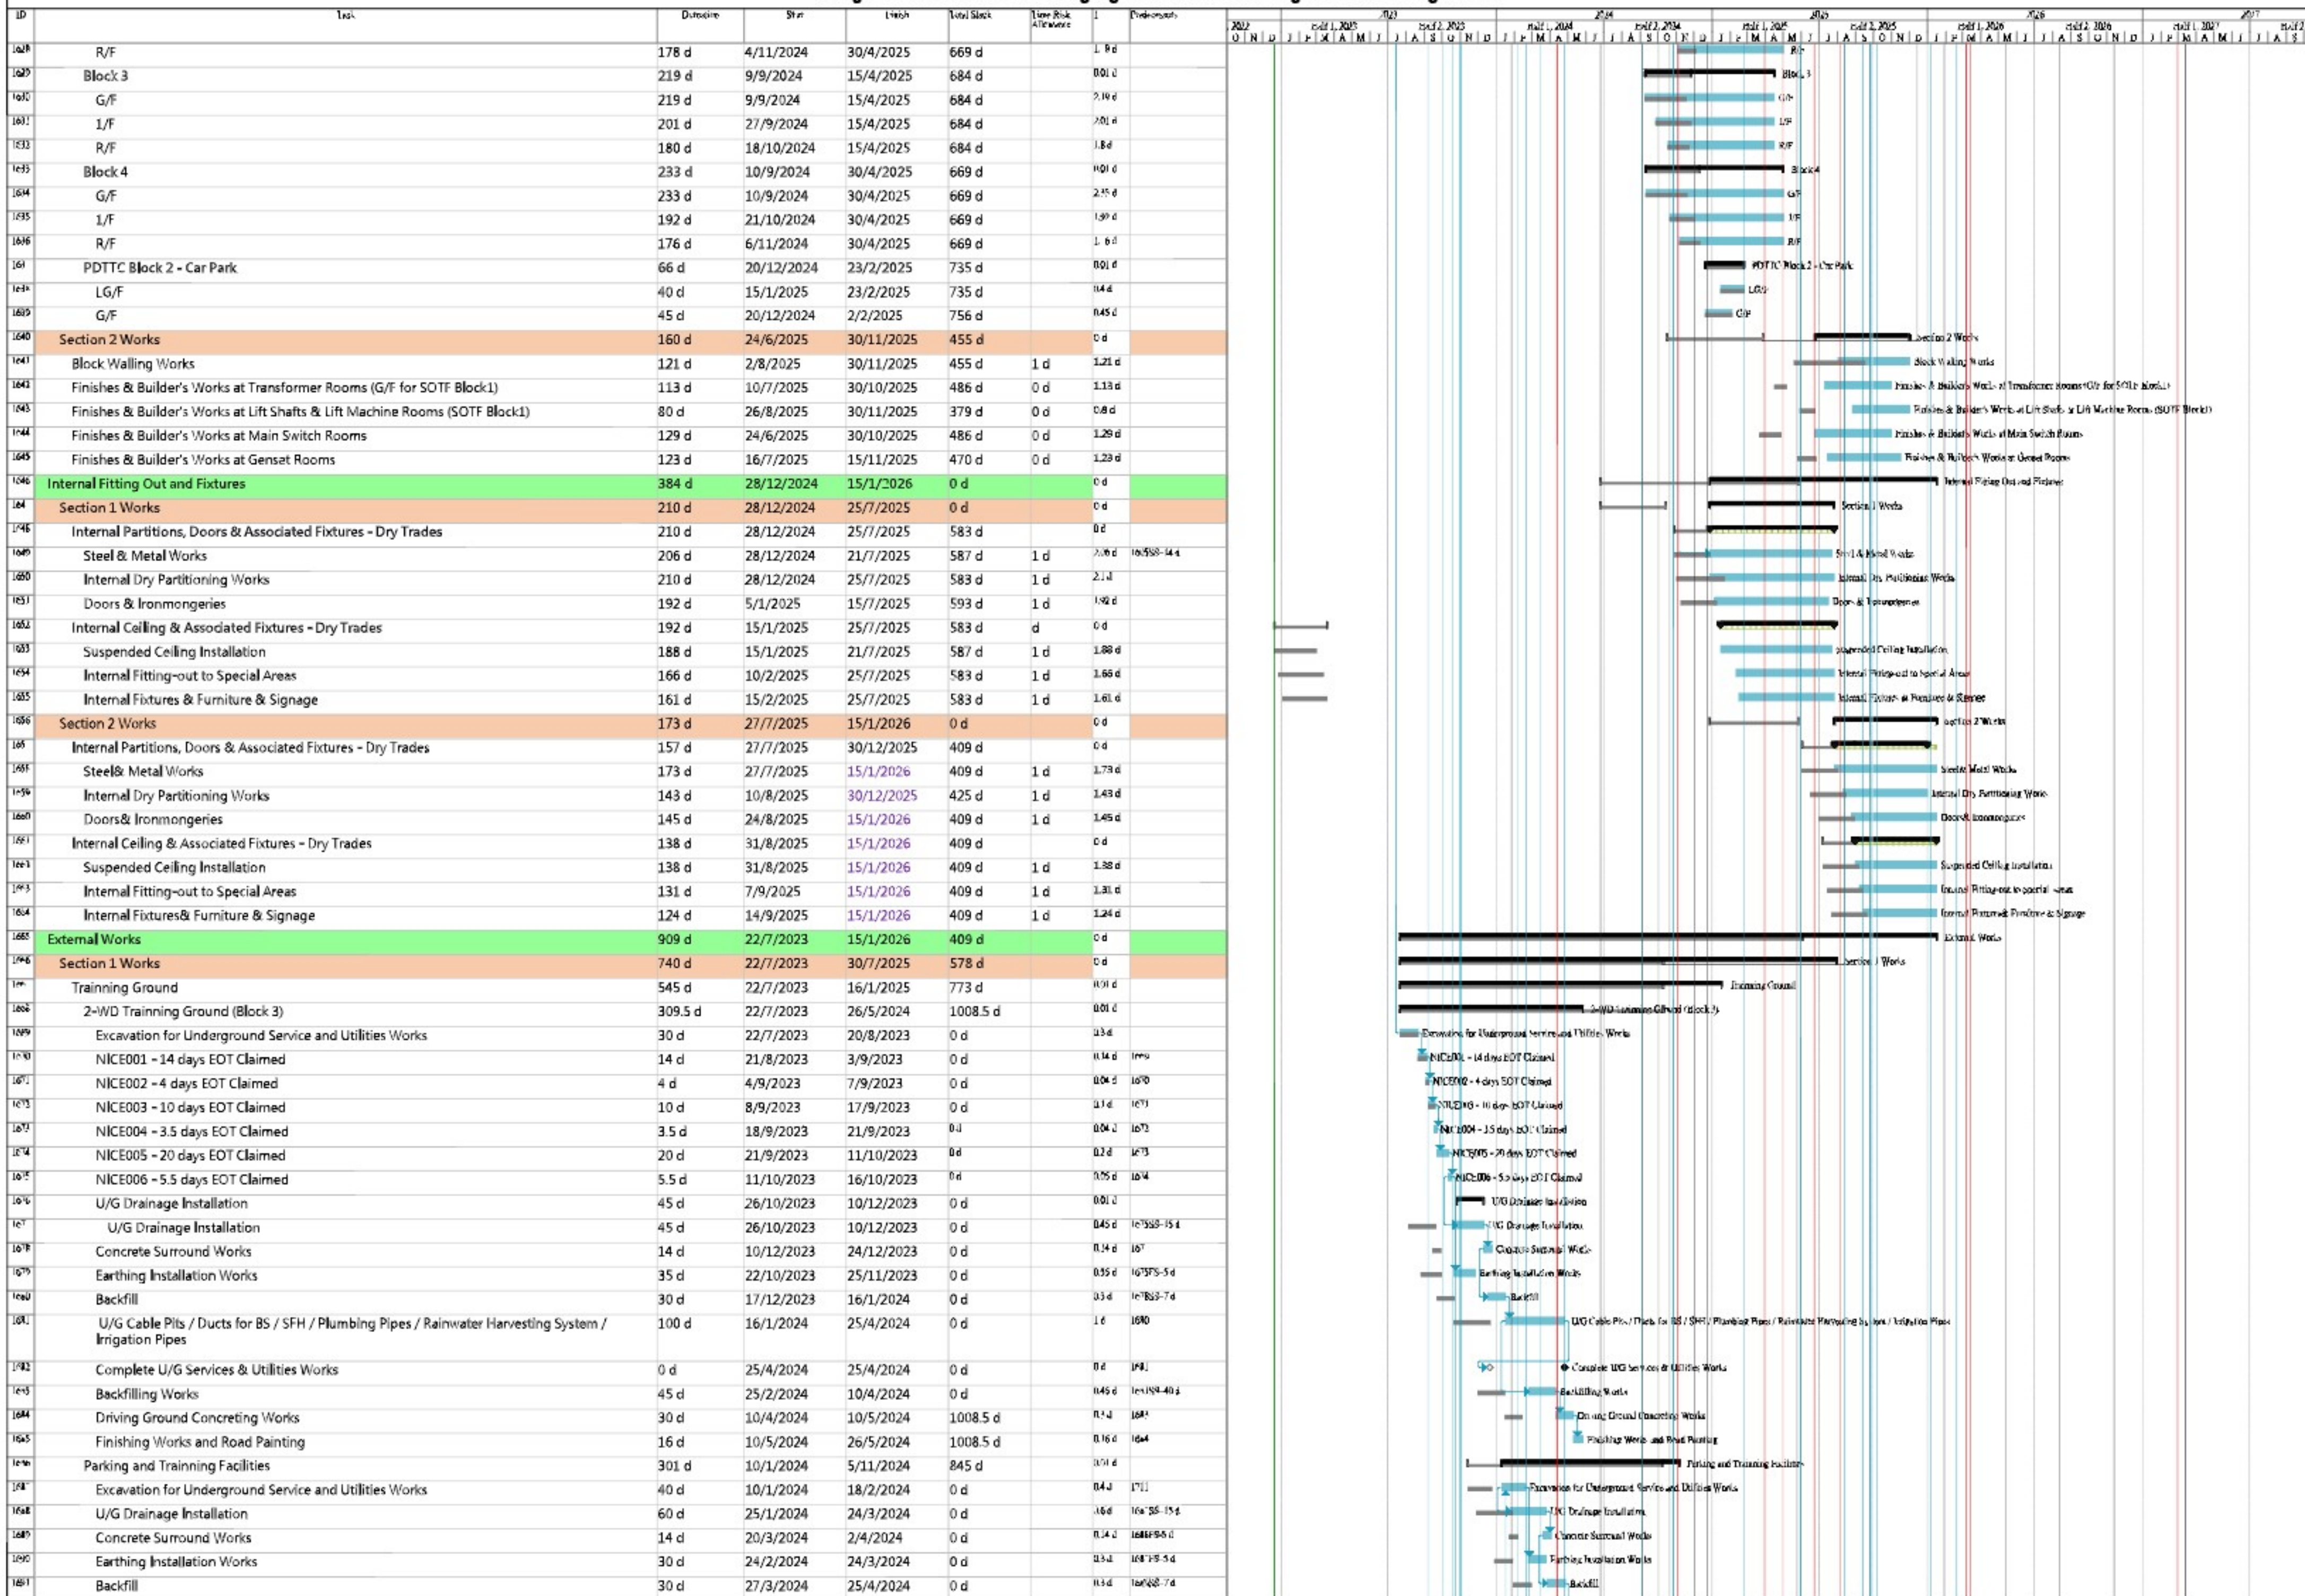

Developed by: [Name]
Reviewed by: [Name]
Task: [Name]

○ Critical Task
■ Milestone
■ Summary

■ Inactive Milestone
■ Inactive Summary
■ Manual Task

■ Dependency
■ Manual Summary
■ Manual Summary

■ Start-only
■ Finish-only
■ External Task


■ External Milestone
■ Mile Driving Protractor Milestone Task
■ Mile Driving Protractor Summary Task

■ Mile Driving Protractor Normal Task
■ Summary

Design & Construction of Kong Nga Po Police Training Facilities Programme

Revision : Revision 16 (August 2025)

ID	Task	Duration	Start	Finish	Total Slack	Time Risk Allowance	1	Endorsements	2022	2023	2024	2025	2026	2027	2028
1683	U/G Cable Pits / Ducts for BS / SFH / Plumbing Pipes / Rainwater Harvesting System / Irrigation Pipes	60 d	26/4/2024	24/6/2024	0 d	168 d	1683								
1685	Complete U/G Services & Utilities Works	0 d	24/6/2024	24/6/2024	0 d	0 d	1685								
1684	Backfilling Works	45 d	5/6/2024	19/7/2024	0 d	0 d	1684								
1685	Driving Ground Concreting Works	30 d	20/7/2024	18/8/2024	924 d	0 d	1685								
1686	Finishing Works and Road Painting	15 d	22/10/2024	5/11/2024	845 d	0 d	1686								
169	Braking Training (Block 4)	282 d	17/10/2023	24/7/2024	949 d	0 d	169								
1686	Excavation for Underground Service and Utilities Works	55 d	17/10/2023	10/12/2023	0 d	0 d	1686								
1689	Excavation for Underground Service and Utilities Works	45 d	17/10/2023	30/11/2023	0 d	0 d	1689								
1791	NICE003 - 10 days EOT Claimed	10 d	1/12/2023	10/12/2023	0 d	0 d	1791								
1792	U/G Drainage Installation	60 d	16/12/2023	13/2/2024	0 d	0 d	1792								
1793	Concrete Surround Works	14 d	9/2/2024	22/2/2024	0 d	0 d	1793								
1794	Earthing Installation Works	40 d	6/12/2023	14/1/2024	0 d	0 d	1794								
1794	Backfill	30 d	16/2/2024	16/3/2024	0 d	0 d	1794								
1795	U/G Cable Pits / Ducts for BS / SFH / Plumbing Pipes / Rainwater Harvesting System / Irrigation Pipes	60 d	17/3/2024	15/5/2024	1019 d	0 d	1795								
1796	Complete U/G Services & Utilities Works	0 d	15/5/2024	15/5/2024	1019 d	0 d	1796								
1797	Backfilling Works	45 d	26/4/2024	9/6/2024	949 d	0 d	1797								
1798	Driving Ground Concreting Works	30 d	10/6/2024	9/7/2024	949 d	0 d	1798								
1799	Finishing Works and Road Painting	15 d	10/7/2024	24/7/2024	949 d	0 d	1799								
1710	Skid Pan (Block 5)	227 d	1/12/2023	14/7/2024	959 d	0 d	1710								
1711	Excavation for Underground Service and Utilities Works	40 d	1/12/2023	9/1/2024	0 d	0 d	1711								
1712	U/G Drainage Installation	50 d	16/12/2023	3/2/2024	0 d	0 d	1712								
1713	Concrete Surround Works	14 d	30/1/2024	12/2/2024	0 d	0 d	1713								
1714	Earthing Installation Works	35 d	15/1/2024	18/2/2024	0 d	0 d	1714								
1715	Backfill	30 d	6/2/2024	6/3/2024	0 d	0 d	1715								
1716	U/G Cable Pits / Ducts for BS / SFH / Plumbing Pipes / Rainwater Harvesting System / Irrigation Pipes	60 d	7/3/2024	5/5/2024	0 d	0 d	1716								
1717	Complete U/G Services & Utilities Works	0 d	5/5/2024	5/5/2024	1029 d	0 d	1717								
1718	Backfilling Works	45 d	16/4/2024	30/5/2024	959 d	0 d	1718								
1719	Driving Ground Concreting Works	30 d	31/5/2024	29/6/2024	959 d	0 d	1719								
1720	Finishing Works and Road Painting	15 d	30/6/2024	14/7/2024	959 d	0 d	1720								
1721	4-WD Training Ground (Block 6 and Block 9)	272 d	30/3/2024	26/12/2024	794 d	0 d	1721								
1722	Excavation for Underground Service and Utilities Works	40 d	30/3/2024	8/5/2024	0 d	0 d	1722								
1723	U/G Drainage Installation	45 d	14/4/2024	28/5/2024	0 d	0 d	1723								
1724	Concrete Surround Works	14 d	24/5/2024	6/6/2024	0 d	0 d	1724								
1725	Earthing Installation Works	30 d	14/5/2024	12/6/2024	0 d	0 d	1725								
1726	Backfill	30 d	31/5/2024	29/6/2024	0 d	0 d	1726								
1727	U/G Cable Pits / Ducts for BS / SFH / Plumbing Pipes / Rainwater Harvesting System / Irrigation Pipes	150 d	30/6/2024	26/11/2024	0 d	0 d	1727								
1728	Complete U/G Services & Utilities Works	30 d	28/8/2024	26/12/2024	794 d	0 d	1728								
1729	Backfilling Works	45 d	9/8/2024	22/9/2024	847 d	0 d	1729								
1730	Driving Ground Concreting Works	27 d	23/9/2024	19/10/2024	847 d	0 d	1730								
1731	Finishing Works and Road Painting	15 d	20/10/2024	3/11/2024	847 d	0 d	1731								
1732	2-WD and 4-WD Training Ground (Block 7)	312 d	19/2/2024	26/12/2024	794 d	0 d	1732								
1733	Excavation for Underground Service and Utilities Works	40 d	19/2/2024	29/3/2024	0 d	0 d	1733								
1734	U/G Drainage Installation	55 d	5/3/2024	28/4/2024	0 d	0 d	1734								
1735	Concrete Surround Works	14 d	24/4/2024	7/5/2024	0 d	0 d	1735								
1736	Earthing Installation Works	30 d	4/4/2024	3/5/2024	0 d	0 d	1736								
1737	Backfill	30 d	1/5/2024	30/5/2024	0 d	0 d	1737								
1738	U/G Cable Pits / Ducts for BS / SFH / Plumbing Pipes / Rainwater Harvesting System / Irrigation Pipes	150 d	31/5/2024	27/10/2024	0 d	0 d	1738								
1739	Complete U/G Services & Utilities Works	60 d	29/7/2024	26/12/2024	794 d	0 d	1739								
1740	Backfilling Works	45 d	10/7/2024	23/8/2024	15 d	0 d	1740								
1741	Driving Ground Concreting Works	30 d	24/8/2024	22/9/2024	874 d	0 d	1741								
1742	Finishing Works and Road Painting	15 d	23/9/2024	7/10/2024	874 d	0 d	1742								
1743	Gas Filling Station (Block 8)	253 d	9/5/2024	16/1/2025	773 d	0 d	1743								
1744	Excavation for Underground Service and Utilities Works	50 d	9/5/2024	27/6/2024	0 d	0 d	1744								
1745	U/G Drainage Installation	45 d	24/5/2024	7/7/2024	773 d	0 d	1745								
1746	Concrete Surround Works	14 d	8/7/2024	21/7/2024	773 d	0 d	1746								
1747	Earthing Installation Works	30 d	13/7/2024	11/8/2024	931 d	0 d	1747								
1748	Backfill	34 d	17/7/2024	19/8/2024	773 d	0 d	1748								
1749	U/G Cable Pits / Ducts for BS / SFH / Plumbing Pipes / Rainwater Harvesting System / Irrigation Pipes	150 d	20/8/2024	16/1/2025	773 d	0 d	1749								
1750	Complete U/G Services & Utilities Works	0 d	16/1/2025	16/1/2025	773 d	0 d	1750								



Design & Construction
Revision Summary
Task

○ Critical Task
○ Milestone
○ Summary

■ Inactive Milestone
■ Inactive Summary
■ Manual Task

□ Dependency
□ Manual Summary
□ Manual Summary

■ Summary
■ Milestone
■ Milestone


■ External Milestone
■ Milestone
■ Milestone

■ Milestone
■ Milestone
■ Milestone

■ Milestone
■ Milestone
■ Milestone

Design & Construction of Kong Nga Po Police Training Facilities Programme

Revision : Revision 16 (August 2025)

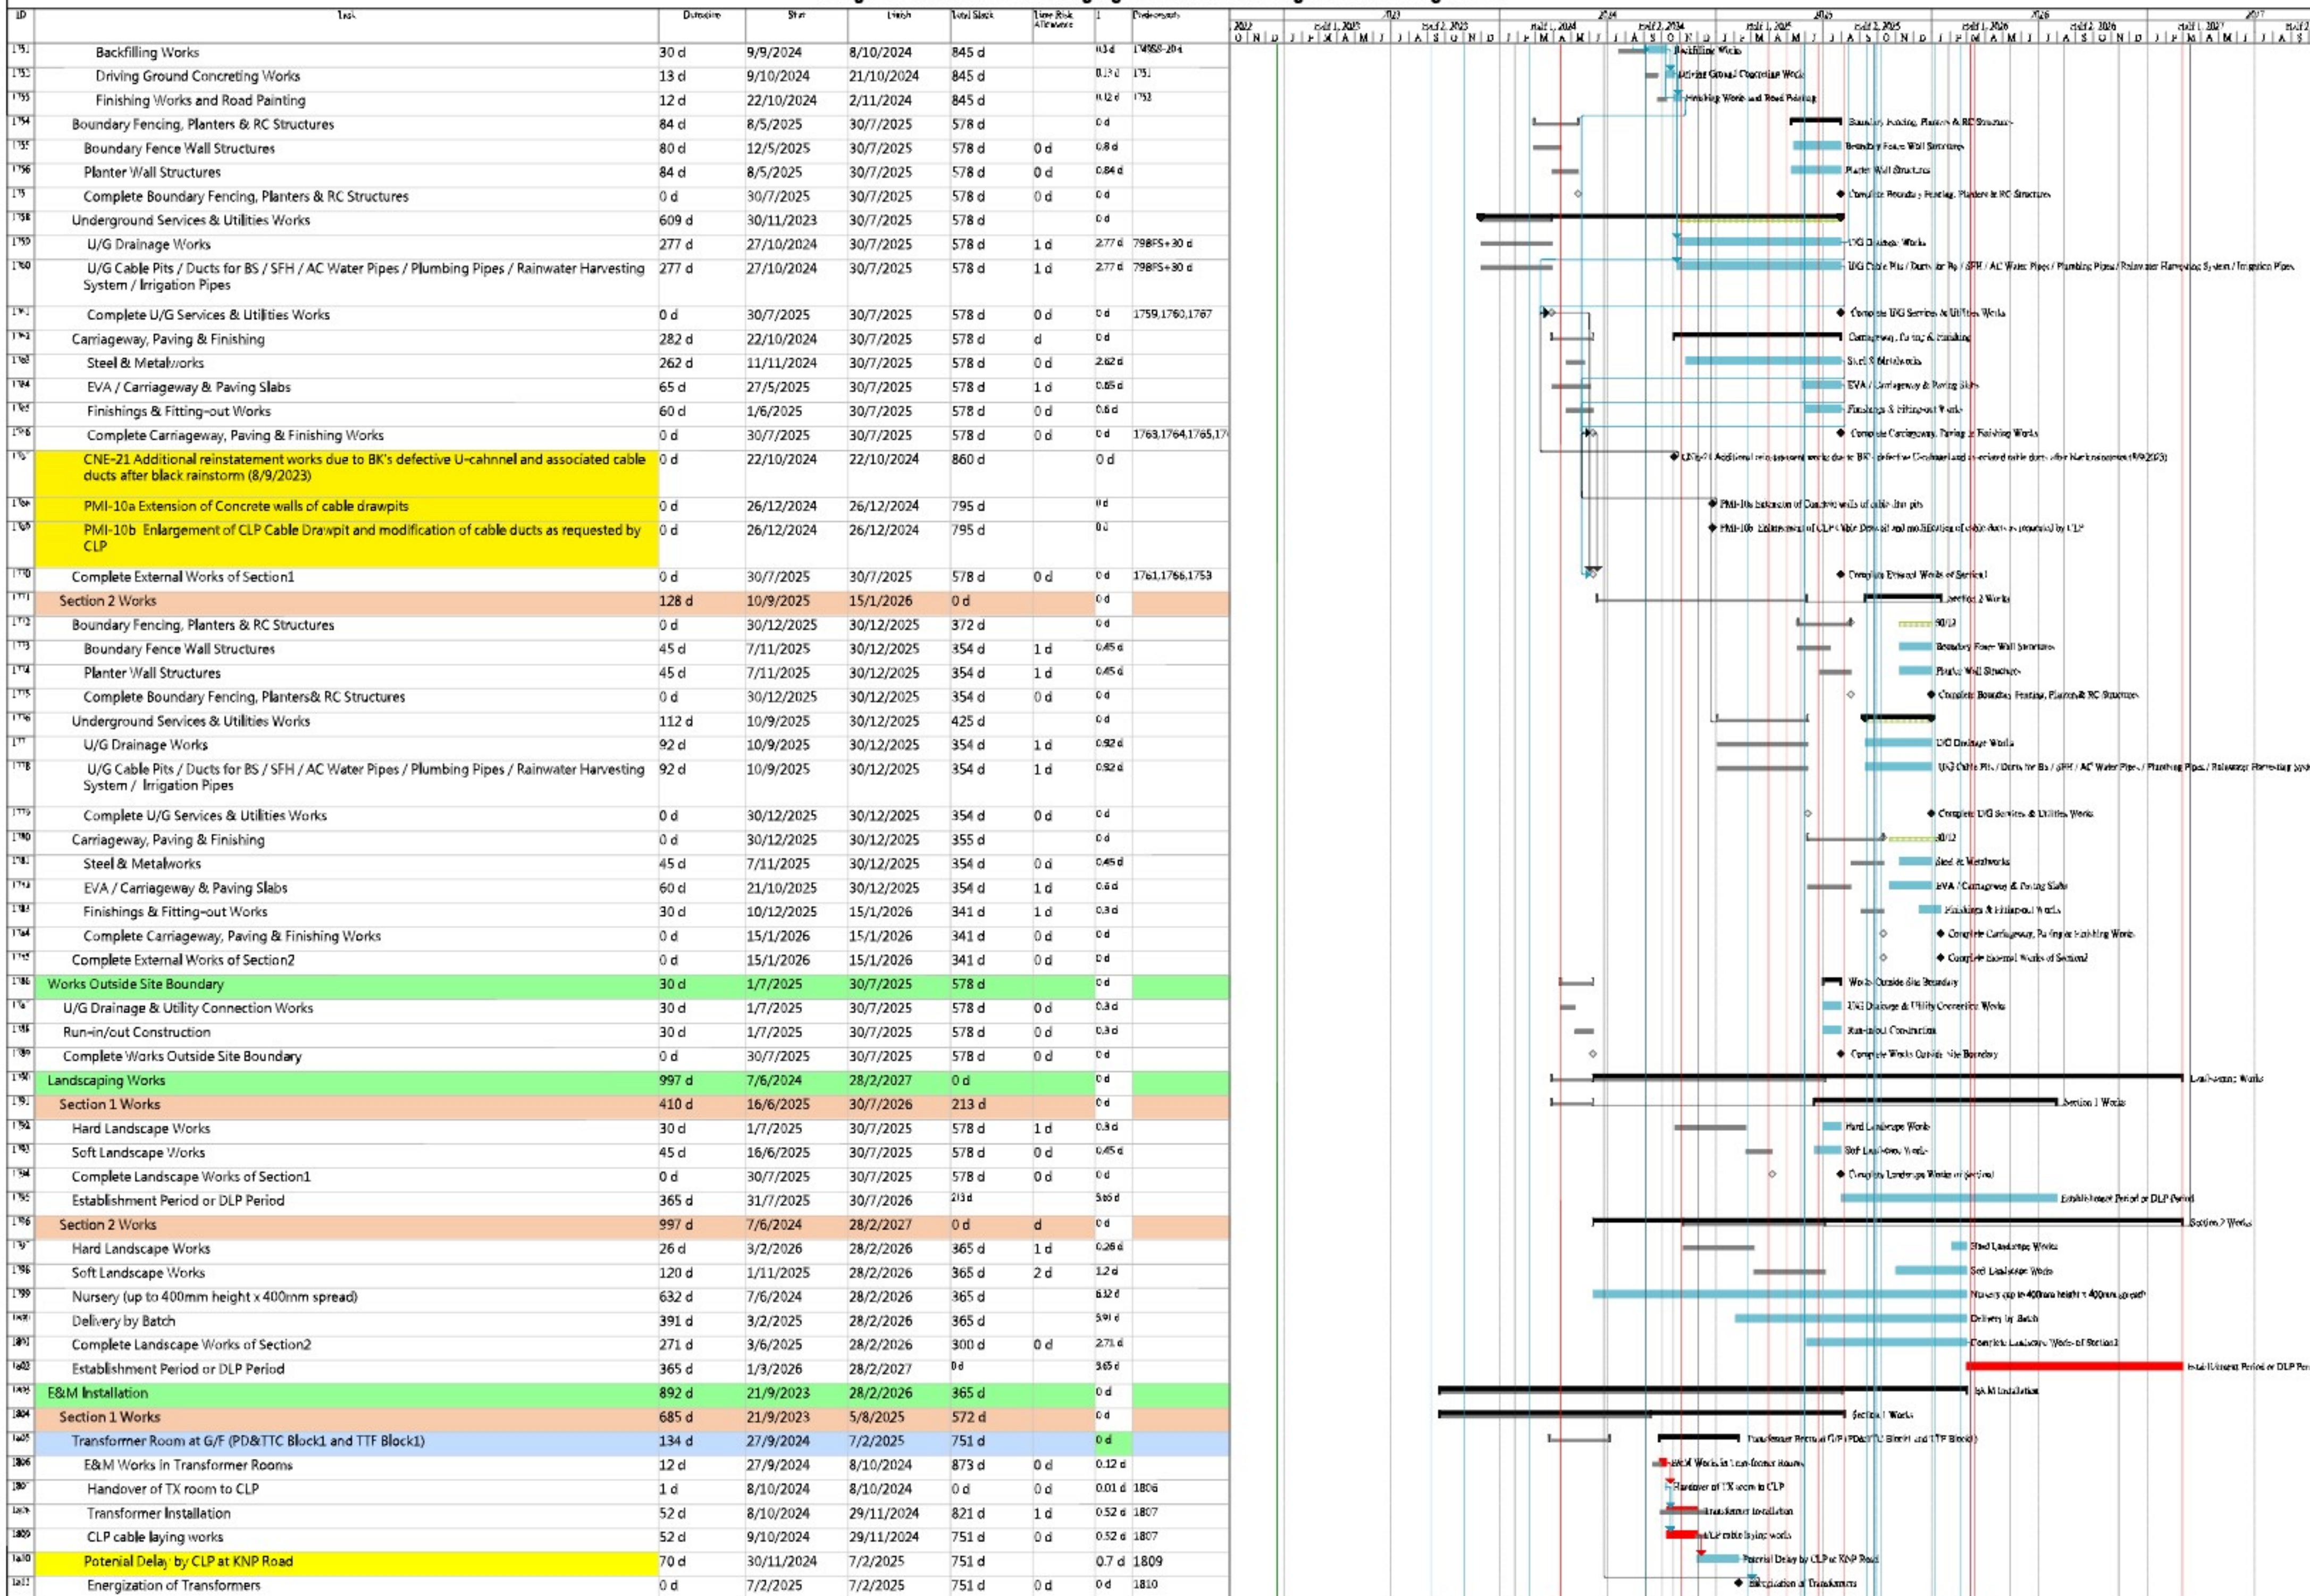

Layout Plan with major construction activities

Legend:

 Working Area

Legend:

 Working Area

Legend:

 Working Area

- Tree planting works

Handed over to user

Handed over to user

- Soil Storage

Handed over to user

- Open cut excavation
- Soil removal
- U.U. Lead in and Pipe Duct Connection
- Construction of superstructure
- E&M installation

- Excavation
- U.U. Lead in and Pipe Duct Connection
- Construction of substructure and superstructure
- E&M installation

- U.U. Lead in and Pipe Duct Connection
- Construction of superstructure
- E&M installation
- Installation of structural steelworks for 25m baffle range

A detailed map of Platform F, showing its layout, surrounding areas, and various features. The map includes a grid system with letters A through J and numbers 1 through 10. Key features include:

- Platform F:** A large rectangular area in the center, labeled 'PLATFORM F'.
- Surrounding Areas:** Various areas around the platform, including 'Area 1' (top left), 'Area 2' (top right), 'Area 3' (middle right), 'Area 4' (bottom right), and 'Area 5' (bottom left).
- Roads and Paths:** Several roads and paths are shown, including 'Road 1' (top left), 'Road 2' (top right), 'Road 3' (middle right), 'Road 4' (bottom right), and 'Road 5' (bottom left).
- Vegetation:** Various types of vegetation are shown, including 'Vegetation 1' (top left), 'Vegetation 2' (top right), 'Vegetation 3' (middle right), 'Vegetation 4' (bottom right), and 'Vegetation 5' (bottom left).
- Other Features:** Other features include 'Feature 1' (top left), 'Feature 2' (top right), 'Feature 3' (middle right), 'Feature 4' (bottom right), and 'Feature 5' (bottom left).

Handed over to user

Handed over to user

- E&M installation

Handed over to user

Handed over to user

Major construction activities carried out in period of February 2026

Legend:

 Working Area



Working Area



- Tree maintenance work

- Handed over to user

- Handed over to user

- Soil Removal

- Handed over to user

- Excavation
- Soil removal
- U.U. Lead in and Pipe Duct Connection
- Construction of superstructure
- E&M installation

- U.U. Lead in and Pipe Duct Connection
- Construction of superstructure
- E&M installation
- Installation of structural steelworks for 25m baffle range

- Excavation
- Backfilling
- U.U. Lead in and Pipe Duct Connection
- Construction of substructure and superstructure
- E&M installation

- E&M installation

- Handed over to user

- Handed over to user

Major construction activities carried out in period of March ~ May 2026

Proactive Environmental Protection Proforma

Proactive Environmental Protection Proforma

Ref*	Proposed Construction Method	Location/Working Period	Anticipated Major Impacts	Recommended Mitigation Measures
EIA 3.9.1; EM&A Log 2.2	Open cut excavation	Kong Nga Po Site	Dust impact from excavation activities and earth moving	• Use of regular water spraying (once every 1.25 hours or 8 times per day) at all active works area exposed site surfaces and unpaved roads, particularly during dry weather • Deploy water bowser for regular water spraying to enhance dust suppression • Manual water spraying for dusty operation where inaccessible by water bowser • Speed control of site transportation • Stockpile of dusty materials will be covered by tarpaulin sheets to avoid wind-blown dust • Vehicles used for transporting dusty materials/spoils will be covered by mechanical cover before leaving the site • Wheel washing facilities will be provided and cleaning the wheel of all vehicles before leaving the site
EIA 4.4.6; EM&A Log 3.2			Noise Control	• Regular inspection and maintenance of plant & equipment in good condition

				• Enclose the noisy part of machineries with noise enclosure • Adopt of Quality Powered Mechanical Equipment (QPME) if possible
			Working in Restricted Hours	• Valid construction noise permit should be obtained and displayed on site • In case of non-compliance with the construction noise criteria, more frequent monitoring and action should be carried out
EIA 5.6.1.2; EM&A Log 4.2			Water Pollution Control	• Cover the stockpiles of construction materials to reduce the potential for water pollution • Provide wastewater treatment facilities prior to discharge of wastewater • Regular inspection and maintenance of wastewater treatment facilities • Wastewater pumped out of the excavation areas will be treated to remove suspended solids prior to discharge • Hard paving or well-compact of main haul road to minimize washout of soil • Wheels of all vehicles and plants will be cleaned before leaving the work areas to remove sediment, soil and debris from the tracked. The wastewater will be treated and reused on site or discharged.
EIA 7.5.1.1 &			Waste Generation	• Training of site personnel in proper waste management and

7.5.1.2; EM&A Log 6.2				chemical handling procedures • Proper storage and sorting of excavated inert materials to maximize on site reuse for backfilling • Surplus inert C&D materials will be disposed of at designated Government's PFRF.
EIA 7.5.1.4; EM&A Log 6.2			Chemical Waste	• Chemical waste should be stored at chemical waste container and collected by a licensed collector to transport and dispose of at the approved Chemical Waste Treatment Centre • Drip tray and chemical spillage kit will be provided on site
EIA 9.7.1 and EM&A Log 8.3			Ecology Concern	• Provide training to frontline workers for the conservative species • Provision of protective fence for the conservative species • Regular inspection for concerned vegetation and conservative species
EIA Table 10.11; EM&A Table 9.1			Landscape and Visual Impact	• Preservation of existing trees will be undertaken in accordance with DEVB TC(W) 7/2015 and Guidelines for Tree Risk Assessment and Management Arrangement • Restrict construction area to minimize the impact on existing retained trees
EIA 3.9.1; EM&A Log 2.2	Soil Removal	Kong Nga Po Site	Dust impact from excavation activities and earth	• Use of regular water spraying (once every 1.25 hours or 8 times per day) at all active works area exposed site surfaces and unpaved roads, particularly during dry weather

			moving	• Water spraying during loading and unloading of excavated materials • Vehicles used for transporting dusty materials/spoils will be covered by mechanical cover before leaving the site • Deploy water bowser for regular water spraying to enhance dust suppression • Speed control of site transportation • Stockpile of dusty materials will be covered by tarpaulin sheets to avoid wind-blown dust • Wheel washing facilities will be provided and cleaning the wheel of all vehicles before leaving the site
EIA 4.4.6; EM&A Log 3.2			Noise Control	• Regular inspection and maintenance of plant & equipment in good condition • Enclose the noisy part of machineries with noise enclosure • Adopt of Quality Powered Mechanical Equipment (QPME) if possible
			Working in Restricted Hours	• Valid construction noise permit should be obtained and displayed on site • In case of non-compliance with the construction noise criteria, more frequent monitoring and action should be carried out
EIA 5.6.1.2; EM&A Log 4.2			Water Pollution Control	• Cover the stockpiles of excavated materials to reduce the potential for water pollution

				• Provide wastewater treatment facilities prior to discharge of wastewater • Regular inspection and maintenance of wastewater treatment facilities • Wheels of all vehicles and plants will be cleaned before leaving the work areas to remove sediment, soil and debris from the tracked. The wastewater will be treated and reused on site or discharged.
EIA 7.5.1.1 & 7.5.1.2; EM&A Log 6.2			Waste Generation	• Training of site personnel in proper waste management and chemical handling procedures • Proper storage and sorting of excavated inert materials to maximize on site reuse for backfilling • Surplus inert C&D materials will be disposed of at designated Government's PFRF.
EIA 7.5.1.4; EM&A Log 6.2			Chemical Waste	• Chemical waste should be stored at chemical waste container and collected by a licensed collector to transport and dispose of at the approved Chemical Waste Treatment Centre • Drip tray and chemical spillage kit will be provided on site
EIA 9.7.1 and EM&A Log 8.3			Ecology Concern	• Provide training to frontline workers for the conservative species • Provision of protective fence for the conservative species • Regular inspection for concerned vegetation and conservative

				species
EIA Table 10.11; EM&A Table 9.1			Landscape and Visual Impact	• Preservation of existing trees will be undertaken in accordance with DEVB TC(W) 7/2015 and Guidelines for Tree Risk Assessment and Management Arrangement • Restrict construction area to minimize the impact on existing retained trees
EIA 3.9.1; EM&A Log 2.2	Construction of footings	Kong Nga Po Site	Air	• Regular inspection and maintenance of plant and equipment in good condition • Regularly clean up stockpiles and debris to avoid accumulation of materials • Dusty materials exceeding 20 bags shall be stored in area sheltered on top and the three sides or covered entirely by impervious sheeting.
EIA 4.4.6; EM&A Log 3.2			Noise Control	• Regular inspection and maintenance of plant & equipment in good condition • Enclose the noisy part of machineries with noise enclosure • Adopt of Quality Powered Mechanical Equipment (QPME) if possible
			Working in Restricted Hours	• Valid construction noise permit should be obtained and displayed on site • In case of non-compliance with the construction noise criteria, more frequent monitoring and action should be carried out

EIA 5.6.1.2; EM&A Log 4.2			Water Pollution Control	- Wheels of all vehicles and plants will be cleaned before leaving the work areas to remove sediment, soil and debris from the tracked. The wastewater will be treated and reused on site or discharged. - Designated location for residual concrete washout - Provide wastewater treatment facilities prior to discharge of wastewater
EIA 7.5.1.4; EM&A Log			Chemical Waste	Drip tray and chemical spillage kit shall be provided on site
EIA 9.7.1 and EM&A Log 8.3			Ecology Concern	- Provide training to frontline workers for the conservative species - Provision of protective fence for the conservative species - Regular inspection for concerned vegetation and conservative species
EIA Table 10.11; EM&A Table 9.1			Landscape and Visual Impact	- Preservation of existing trees will be undertaken in accordance with DEVB TC(W) 7/2015 and Guidelines for Tree Risk Assessment and Management Arrangement - Implement temporary traffic arrangement which control construction area to minimize landscape and visual impacts
EIA 3.9.1; EM&A Log 2.2	Construction of substructure and	Kong Nga Po Site	Air	- Regular inspection and maintenance of plant and equipment in good condition - Regularly clean up stockpiles and debris to avoid

	superstructure			accumulation of materials Dusty materials exceeding 20 bags shall be stored in area sheltered on top and the three sides or covered entirely by impervious sheeting.
EIA 4.4.6; EM&A Log 3.2			Noise Control	- Regular inspection and maintenance of plant & equipment in good condition - Enclose the noisy part of machineries with noise enclosure - Adopt of Quality Powered Mechanical Equipment (QPME) if possible
			Working in Restricted Hours	- Valid construction noise permit should be obtained and displayed on site - In case of non-compliance with the construction noise criteria, more frequent monitoring and action should be carried out
EIA 5.6.1.2; EM&A Log 4.2			Water Pollution Control	- Cover the stockpiles of construction materials to reduce the potential for water pollution - Provide wastewater treatment facilities prior to discharge of wastewater - Wastewater generated from surface runoff shall be treated prior to discharge - Manholes should be temporarily sealed to prevent silt, construction materials or debris from entering the drainage system.

EIA 7.5.1.1; EM&A Log 6.2			Waste Management	• Cover stockpiles of C&D materials by impervious sheets to avoid wind-blown dust. • Spray water on all dusty materials including C&D materials immediately prior to any loading transfer operation • Segregation and storage of different types of waste in different containers or skips to enhance reuse or recycling of materials and their proper disposal
EIA 7.5.1.4; EM&A Log 6.2			Chemical Waste	• Drip tray and chemical spillage kit shall be provided on site
EIA 9.7.1 and EM&A Log 8.3			Ecology Concern	• Provide training to frontline workers for the conservative species • Provision of protective fence for the conservative species • Regular inspection for concerned vegetation and conservative species
EIA Table 10.11; EM&A Table 9.1			Landscape and Visual Impact	• Preservation of existing trees will be undertaken in accordance with DEVB TC(W) 7/2015 and Guidelines for Tree Risk Assessment and Management Arrangement • Implement temporary traffic arrangement which control construction area to minimize landscape and visual impacts
EIA 3.9.1; EM&A Log 2.2	Backfilling	Kong Nga Po Site	Air	• Deploy water bowser for regular water spraying to enhance dust suppression

				• Manual water spraying for dusty operation where inaccessible by water bowser • Speed control of site transportation • Stockpile of dusty materials will be covered by tarpaulin sheets to avoid wind-blown dust • Vehicles used for transporting dusty materials/spoils will be covered by mechanical cover before leaving the site • Wheel washing facilities will be provided and cleaning the wheel of all vehicles before leaving the site
EIA 4.4.6; EM&A Log 3.2			Noise Control	• Regular inspection and maintenance of plant & equipment in good condition • Enclose the noisy part of machineries with noise enclosure • Adopt of Quality Powered Mechanical Equipment (QPME) if possible
			Working in Restricted Hours	• Valid construction noise permit should be obtained and displayed on site • In case of non-compliance with the construction noise criteria, more frequent monitoring and action should be carried out
EIA 5.6.1.2; EM&A Log 4.2			Water Pollution Control	• Cover the stockpiles of construction materials to reduce the potential for water pollution • Provide wastewater treatment facilities prior to discharge of wastewater

				• Regular inspection and maintenance of wastewater treatment facilities • Wastewater pumped out of the excavation areas will be treated to remove suspended solids prior to discharge • Hard paving or well-compact of main haul road to minimize washout of soil • Wheels of all vehicles and plants will be cleaned before leaving the work areas to remove sediment, soil and debris from the tracked. The wastewater will be treated and reused on site or discharged.
EIA 7.5.1.1 & 7.5.1.2; EM&A Log 6.2			Waste Generation	• Training of site personnel in proper waste management and chemical handling procedures • Proper storage and sorting of excavated inert materials to maximize on site reuse for backfilling • Surplus inert C&D materials will be disposed of at designated Government's PFRF or reuse at other contracts.
EIA 3.9.1; EM&A Log 2.2	Installation of structural Steelworks for 300m baffle range	Kong Nga Po Site	Air	• Regular inspection and maintenance of plant and equipment in good condition • Water spraying at exposed areas • Regularly clean up stockpiles and debris to avoid accumulation of materials
EIA 4.4.6;			Noise Control	• Regular inspection and maintenance of plant & equipment in

EM&A Log 3.2				good condition • Adopt of Quality Powered Mechanical Equipment (QPME) if possible
			Working in Restricted Hours	• Valid construction noise permit should be obtained and displayed on site • In case of non-compliance with the construction noise criteria, more frequent monitoring and action should be carried out
EIA 5.6.1.2; EM&A Log 4.2			Water Pollution Control	• Cover the stockpiles of construction materials to reduce the potential for water pollution • Provide wastewater treatment facilities prior to discharge of wastewater • Wastewater generated from surface runoff shall be treated prior to discharge
EIA 7.5.1.1; EM&A Log 6.2			Waste Management	• Cover stockpiles of C&D materials by impervious sheets to avoid wind-blown dust. • Spray water on all dusty materials including C&D materials immediately prior to any loading transfer operation • Segregation and storage of different types of waste in different containers or skips to enhance reuse or recycling of materials and their proper disposal
EIA 7.5.1.4; EM&A Log 6.2			Chemical Waste	• Drip tray and chemical spillage kit shall be provided on site

EIA Table 10.11; EM&A Table 9.1			Landscape and Visual Impact	• Preservation of existing trees will be undertaken in accordance with DEVB TC(W) 7/2015 and Guidelines for Tree Risk Assessment and Management Arrangement • Implement temporary traffic arrangement which control construction area to minimize landscape and visual impacts
------------------------------------	--	--	--------------------------------	---

**EIA Ref/ EM&A Log/ Design Document Ref*

***Details of equipment, vehicles, plants, processes, technologies for the construction method*

Design and Construction of Kong Nga Po Police Training Facilities
Proactive Environmental Protection Proforma

Working Period: February 2026

Ref*	Proposed Construction Method	Location/Working Period	Anticipated Major Impacts	Recommended Mitigation Measures	Photo Records (Partial)
EIA 3.9.1; EM&A Log 2.2	Open cut excavation	Kong Nga Po Site	Dust impact	- Manual water spraying for dust suppression - Regular inspection and maintenance of plant and equipment in good condition - Cover stockpile with impervious sheets or grout - Provide wheel washing facility at site entrance	 By subcontractor at KNP site

					 04.02.2026 By subcontractor at KNP site
EIA 4.4.6; EM&A Log 3.2			Noise	• Regular inspection and maintenance of plant & equipment in good condition • Deploy Quality Powered Mechanical Equipment (QPME) if possible • Valid construction noise permit should be displayed at site entrance.	 16.02.2026 By main contractor at KNP site

					 27.02.2026 By main contractor at KNP site
EIA 9.7.1 and EM&A Log 8.3			Ecology Concern	• Provide training to workers about the conservative species • Provision of protective fence for the conservative species • Regular inspection for concerned vegetation and conservative species	 28.02.2026 By main contractor at KNP site

					 By subcontractor at KNP site
EIA 3.9.1; EM&A Log 2.2	Soil Removal	Kong Nga Po Site	Air	• Deploy water bowser for regular water spraying to enhance dust suppression • Cover dusty materials with impervious sheets • Exposed slopes covered with waterproof layers such as tarpaulin sheets or grout to reduce the potential for sediment laden runoff entering	 By main contractor at KNP site

				the drainage system. The speed of the trucks within the site should be controlled to about 10km/hour in order to reduce adverse dust impacts and secure the safe movement around the site.	
EIA 4.4.6; EM&A Log 3.2			Noise	- Regular inspection and maintenance of plant & equipment in good condition - Deploy Quality Powered Mechanical Equipment (QPME) if possible	

EIA 5.6.1.2 and EM&A Log 4.2			Water Quality	• Cover exposed slopes with impervious sheets or cement grout. • Wastewater pumped out of the excavation areas shall be treated to remove suspended solid prior to discharge. • Provide desilting/ sedimentation devices for wastewater treatment prior to discharge. • Provide drip tray to prevent spillage of fuels	 By main contractor at KNP site  By main contractor at KNP site
---	--	--	----------------------	---	---

EIA Table 10.11; EM&A Table 9.1			Landscape and Visual Impact	• Preservation of existing trees will be undertaken in accordance with DEVB TC(W) 7/2015 and Guidelines for Tree Risk Assessment and Management Arrangement • Implement temporary traffic arrangement which control construction area to minimize landscape and visual impacts • Minimize visual impact during construction stage. Site office not visually prominent from public room and surrounding • Planting will take place as soon the planting area is installed with	 By main contractor at KNP site
--	--	--	------------------------------------	--	--

				subsoil drainage Decorative hoarding is provided	
EIA 3.9.1; EM&A Log 2.2	Construction of footings, substructure and superstructure	Kong Nga Po Site	Air	- Cover dusty materials with impervious sheets - Exposed slopes covered with waterproof layers such as tarpaulin sheets or grout to reduce the potential for sediment laden runoff entering the drainage system. - Provide wheel washing facility at site entrance	 By subcontractor at KNP site  By subcontractor at KNP site

EIA 4.4.6; EM&A Log 3.2			Noise	Valid construction noise permit should be obtained and displayed on site	 04.02.2026 By main contractor at KNP site
EIA 5.6.1.3 and EM&A Log 4.2			Water Quality	- Surface water from concrete batching areas and the rest of the site should be separated as far as possible. - Temporary drainage is free of obstruction. - Gullies are sealed to prevent silt or debris from entering the drainage system.	 06.02.2026 By main contractor at KNP site

					A photograph of a concrete mixer truck with a white and orange drum, parked on a dirt area at a construction site. A person in an orange safety vest is standing near the truck. A date stamp '16.02.2026' is visible in the bottom right corner of the image. By subcontractor at KNP site A photograph showing a concrete curb or drainage channel installed at a construction site. To the left, there is a green tarp covering some vegetation. A date stamp '16.02.2026' is visible in the bottom right corner of the image. By main contractor at KNP site
--	--	--	--	--	--

EIA 7.5.1.2 and EM&A Log 6.2			Waste Management	• Segregation and storage of different types of waste in different containers or skips or stockpiles to enhance reuse or recycling of materials and their proper disposal • Sort non-inert C&D materials to recover any recyclable portions	 By main contractor at KNP site  By main contractor at KNP site
---	--	--	-----------------------------	--	---